# ENGAGE BLACK Black-Vault HSM.TAC



The **Black**•**Vault HSM**.<sup>TAC</sup> is an Ethernet attached **H**ardware **S**ecurity **M**odule that combines a cryptographically advanced **HSM** with a Smart Card Reader.

#### **Independently Certified**

The **Black**•**Vault HSM**.<sup>TAC</sup> is an independently certified standards based security module that performs key management and cryptographic operations for: application data, regulatory compliance and critical security systems employed by governments, PKI, enterprises...

Two-factor authentication and administrator roles with M of N prevents unauthorized access to critical security parameters.

#### Portable / Embeddable Form Factor

The compact "hard drive" form-factor and battery backed solid state key storage makes it possible to secure cryptographic keys in an HSM appliance that easily fits in a safe. The small form factor with Ethernet connection also supports mounting the **Black**•**Vault HSM**<sup>.TAC</sup> within application servers and other compact environments.

#### **Military Grade Tamper Reactive**

The Cryptographic Boundary is within Secure CPU's silicon. The Die Shield has dynamic fault detection with real time environmental and active tamper detection circuitry.

- Achieves Active Level 3+ Tamper
- Eliminates Inadvertent Tamper
- Transport Safe

#### **TAC - Tactical**

By design the **Black**•Vault HSM.<sup>TAC</sup> is a rugged, small form factor, certified HSM that meets the key security needs for a wide array of the tactical infrastructure use cases.

#### Benefits

- Overcomes Vulnerabilities of Soft Crypto
- Protects Intellectual Property
- Expedites Regulatory Compliance Audits
- Compact Size Fits in Safe Deposit Box
- Embeddable: Ethernet Attached - Hard Drive Form Factor
- Secure Key Management:
  - Generation, Storage, and Backup
- Protects Registration Authority keys
- Efficient offline root CA
- Code and Document Signing
- Remote Management


#### Features

- Solid State Design
- Certified Security Architecture
- Tamper Reactive Die Shield
- Suite B Accelerators
- Support for NIST ECC Curves
- Secure Authentication/Access
- Role Based Multi factor authentication
- Backup through Key Cloning
- M of N per role

# PUBLIC KEY INFRASTRUCTURE

**Black**•**Vault HSM**<sup>.TACs</sup> are used by commercial and private Certificate Authorities (CAs) and registration authorities (RAs) to generate, store, and manage key pairs.

The **Black**•Vault HSM<sup>.TAC</sup> ensures that the Private key associated with a Certificate's public key is kept private. All cryptographic operations are executed within a 7 year battery backed semiconductor with a tamper reactive die shield.



The **Black**•Vault **HSM**.TAC provides:

- Logical and physical protection
- Multi-factor user authorization
- Full audit and log traces
- Secure key backup

# SECURING SENSITIVE AND SECRET DATA

Encrypting and Decrypting data using secret keys generated and retained within the **Black**•**Vault HSM**.<sup>TAC</sup> provides a certifiable level of assurance. Performing cryptographic operations in software within a general purpose operating system has proven exploits.

The vast majority of an enterprise's information is sensitive or secret and must be protected to prevent serious risk to operational continuity. Employment of the **Black**•**Vault HSM**<sup>.TAC</sup> isolates and shields the critical security parameters and cryptographic operations.

Ethernet

BLACK VAULT

HARDWARE

SECURITY


MODULE

# **CODE AND DOCUMENT SIGNING**

Software Developers need to deliver Code, Patches, Scripts, and Libraries that are readily verifiable by installers as being authentic and unmodified. Similarly, electronic transfer and storage of documents increasingly requires that the validity of those documents can be ascertained.

Digital signatures provide a proven cryptographic process for code installers and document users to validate the authenticity of the publisher and content.

The critical security parameter of a code or document signing process is the private signing key. The theft of a private code or document signing key by a person or organization with malicious intent could result in the introduction of attacks, malware, and corruption from what appears to be a "validated source".



Keys stored on the same servers used for code development or document generation are susceptible to unauthorized access and compromise.

Generating and Storing the private code signing keys in the tamper-reactive, independently FIPS certified **Black•Vault HSM**<sup>.TAC</sup> hardware security module eliminates this organization crushing vulnerability.

Proven interoperability with:

- Microsoft Authenticode
- Java Jarsigner
- Adobe Signature

## MANAGEMENT

**Black**•**Vault HSM**<sup>.TAC</sup> utilizes an intuitive iconic user interface. A structured menu system facilitates straight forward configuration and management.

The user interface presents Crypto Officers with a sequence of dialog boxes that lead through a series of well-defined steps to initiate the HSM and provision cards and keys.

#### **Integrated Smart Card Reader**

**Black**•**Vault HSM**.<sup>TAC's</sup> Smart Card reader connects to industry standard smart cards via PKCS#11

Two-factor authentication (2FA) solutions secure Crypto Officer and Operator access.



www.engageblack.com 47FA-79C0-942A-A4FB

#### **BV•Tool**

Powerful, easy to use, **PKCS#11 CLI** tool able to perform many different cryptographic operations that works on Windows/Linux/MacOS both physical and virtualized. Some of the functions are:

#### Key Management


- Create Keys
- Delete Keys
- Key Import/Export
  Wrap/Unwrap
- CSRs
- Certificates
- Self-Signed Certificates

**Create Certificates** 

#### As well as...

- Sign/Verify Files
- Encrypt/Decrypt Files

Able to utilize AES, RSA EC, and DSA key types. Sign using various hashes including but not limited to SHA256, SHA384, and SHA512.

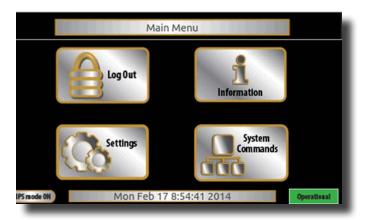

### **Security Officer Card Creation**

Straight forward setup of Security Officer(s) cards with "m of n" multifactor authentication.

Create Security (	Officer ca	ard set	:	
Number of Cards in Total to Create	5	•		DONE
Number of Cards Required to Login	3	•		
	-	-		_

**SDK** comes with purchase of an **HSM** designed to help you integrate your application with the BlackVault through its **PKCS#11** interface

- Includes example code of Python and C++

Simple easy to use integration guides with stepby step walkthroughs to get you up and running with a variety of applications including:

- Authenticode
- Eclipse
- Android Dev Studio
- Java
- Microsoft Active Directory Certificate Services

# ENGAGE BLACK Black·Vault HSM.TAC

# Tactically Deployable Hardware Security Module



### **Technical Specifications**

#### Supported Operating Systems

- Physical: Windows, Linux
- VMWare: Windows and Linux

#### Application Program Interfaces (APIs)

• PKCS#11, Java (JCE), Microsoft Authenticode CNG

#### **Host Connectivity**

- Ethernet 10/100 Copper; Optional SFP
- TLS

#### Cryptography

- Asymmetric public key algorithms:
  - RSA (1024, 2048, 4096)
  - Diffie-Hellman ECDH, DSA, ECDSA
- Symmetric algorithm: AES 128, 192, 256
- Hash/message digest: SHA-1, SHA-2 (224, 256, 384, 512bit)
   Sull Suite Dimensional with
- Full Suite B implementation with Elliptic Curve Cryptography (ECC)
- NIST SP 800-90 compliant DRBG

#### Certification

• FIPS 140-2 Level 3

#### Management and Monitoring

- Graphical User Interface
- Remote Management
- Command Line Interface
- Syslog diagnostics support

#### **Physical Characteristics**

- Portable/Embeddable (Server Hard Drive Mechanics)
- Integrated Smart Card Reader
- Dimensions 102 x 153 x 26 mm (4 x 6 x 1in)
- Weight: 454g (1lb)
- Temperature: operating -20 to 60°C, storage -20 to 60°C
- Humidity: operating 10 to 90% storage 0 to 95%

#### Safety, and Environmental Compliance

• UL, ČE, FCC • RoHS

#### Power

- DB9 Connector: Dual Hot Standby 5 to 30 VDC
- Power consumption: 4W